

The Sabertooth Hose Reel

Dual Action System Designed for Vertical and Horizontal Applications

Controlled Feed Rate

The feed of the hoses is controlled by an external gearbox. This simple design allows quick access for repairs.

The Sabertooth™ ends hose struggle, provides greater safety and higher productivity.

Hose Stops


Adjustable hose stops automatically stop hose travel for both in and out movement.

Sturdy Base

Tripod design adjusts easily from job to job.

Dump Valve & Swivel Connection

The dump valve and swivel connections are easy to access and available in your choice of either 15k or 20k psi.

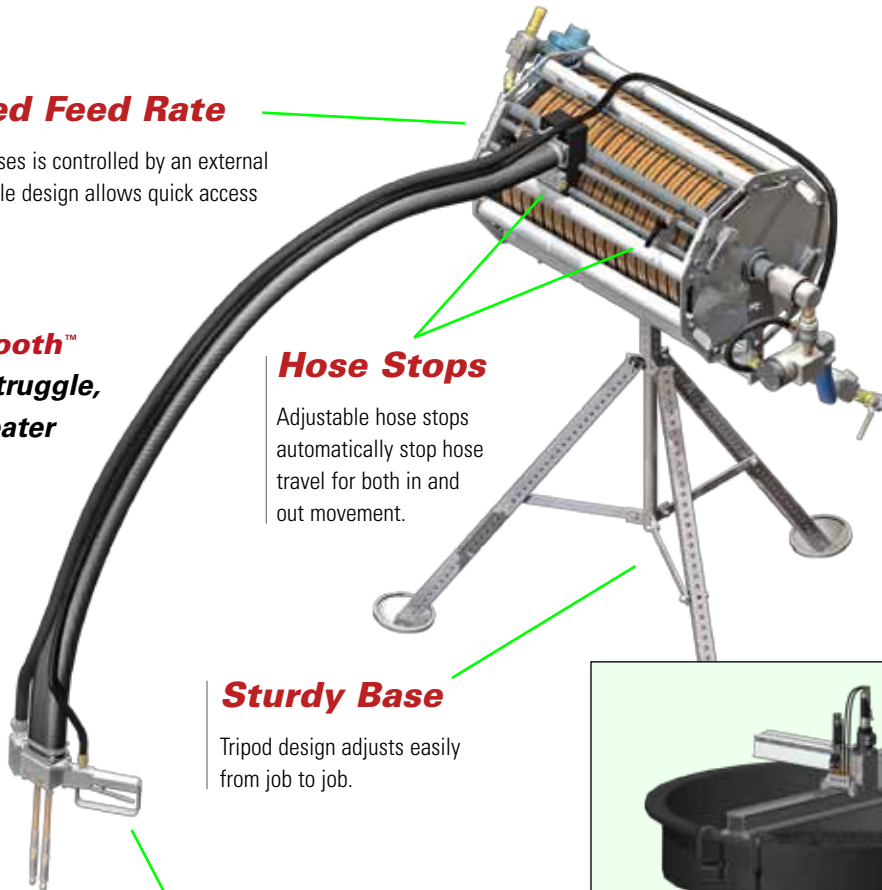

The **Light Weight Positioner** removes the operator from the high pressure water. The **LWP** can be automatically indexed across the tube bundle surface for both vertical and horizontal applications.

Convenient Controls

The **Sabertooth™** features easy controls. In and out functions are controlled with a push of the operator's thumb. The handles are adjustable for ergonomic comfort in both horizontal and vertical operations. The left hand controls the dump valve.

SABERTOOTH™ Specs

MODEL	SBT-20k™	
Max Pressure	15k or 20k psi	1,000 or 1,400 Bar
Inlet Port	1/2, 3/4 npt or 3/4MP	
Stroke Speed	Fwd 0-1.5 ft./sec	Rev 3.0 ft./sec
Air Supply Req.	100 CFM @ 80 psi	47 l/sec. @ 55 Bar
Min. Tube I.D.	3/4 - 2 in.	19-50 mm
Tube Nozzle	Banshees , BN18, BN24, BN33	
Stroke	60 ft.	18 meters
Weight (complete)	250 lbs.	113 kg

Tool Talk™

Filtration Units are Essential

The quality of the air provided to any of our pneumatic tools greatly affects performance. That's why we recommend the **FO-200™ Air Pretreat System** which filters out water and provides lubrication for the air motors.



TUBE CLEANING



www.advancedpressuresystems.com
Toll Free in North America:
1 (877) 290-4277 or (281) 290-9950

