

Waterlancer & Hose Reels

Big Flow Waterlancers and Storage Hose Reels

The Big Flow Waterlancer™

The **BFW™** was originally designed as a boiler floor washer but contractors have found many other uses for this tool. With a 300 gpm flow capability the **BFW™** can handle practically any large vessel with limited entry access. It's perfect for pulp plant boilers, refinery and chemical plant vessels, as well as furnace radiant sections. It comes with an adjustable cart with boom positioner and is driven by an air motor.

The BFW™ Big Flow Waterlancer™




For jobs where large flow is necessary to remove heavy deposits.

BFW™ Specs		
Max. Pressure	10k psi	700 bar
Flow Capacity	300 gpm	1140 lpm
Flow Rating	13.0 Cv	
Rotation	10-50 rpm	
Stroke Length	13ft	4 m
Stroke Rate	8-35 ft/min	2.4-10.7 m/min
Inlet Port	1 npt	

Options Up to 24 ft.

Longer stroke lengths are possible with the cantilever **Boiler Long Snout** system shown here.

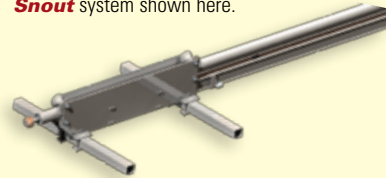


Waterblast Hose Storage Reels

Protect your hoses and improve safety with extra hose reels. They safely store hose, easily move from job to job, and reduces trip hazards. Using our swivels these reels can accommodate 15k, 20k or 40k psi hoses. Choose from air or hydraulic powered rewind systems.

HWB™ Specifications

Hose O.D.	Max. Length
0.8 in. 20 mm	440 ft 168 m
1.0 in. 25 mm	275 ft 122 m
1.2 in. 30 mm	167 ft 51 m
Reel Diameter	32 in. 810 mm
Reel Height	34 in. 860 mm
Reel Width	18 in. 460 mm
Hose Bend Radius	10 in. 810 mm
Weight (w/o Hose)	170 lbs 77 kg

HWB™ Storage Hose Reels

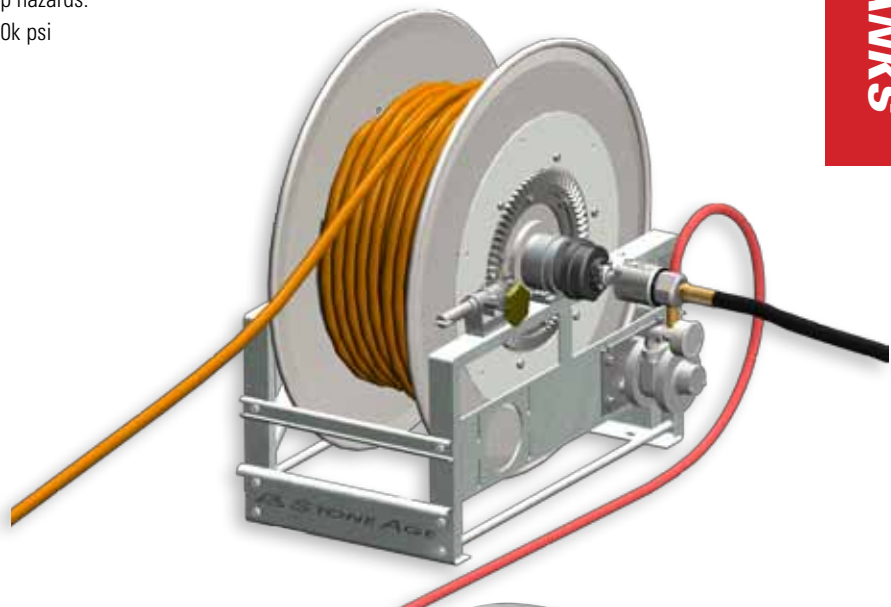

VESSELS & TANKS



www.advancedpressuresystems.com
Toll Free in North America:
1 (877) 290-4277 or (281) 290-9950

