


More StoneAge® Rotary Couplings

Connects to Your Hose for Twist Free Operations

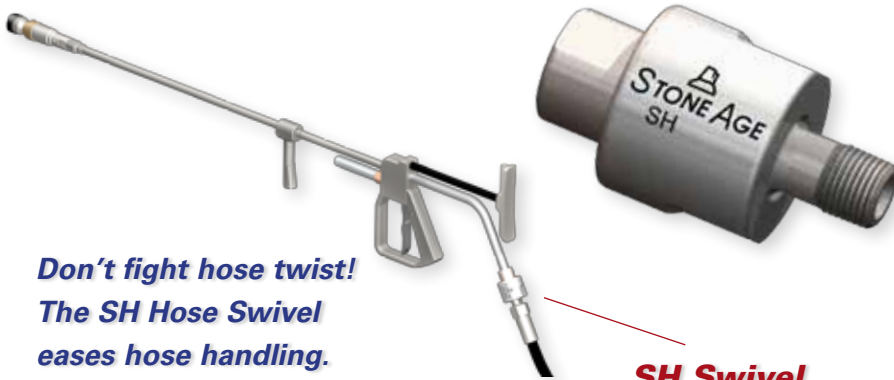

*Don't fight hose twist!
The SH Hose Swivel
eases hose handling.
Features low-torque for
easy rotation.*

**SH Swivel
Here**

SH Swivel Specs

MODEL	SH-P8P8	
Max. Pressure	15k psi	1000 bar
Max. Rotation Spd	250 rpm	
Flow Capacity	50 gpm	190 lpm
Flow Rating	2.3	
Inlet Port	1/2 npt	
Shaft Connection	1/2 npt	
Overall Length	4.125 in.	105 mm
Weight	1.9 lb	.9 kg
Body Diameter	2.25 in.	57 mm

SL-P8P4-0°

SL-M9AV9-0°

SL-H9H9-C



SL Series

The 15k and 20k models of our **SL Swivels** are offered with optional 90° inlet nuts. All **SL** models feature replaceable seals, smooth ball bearings, stainless steel construction and low torque for easy rotation.

SL Swivel Specifications

MODEL	SL-P8P4		SL-M9AV9		SL-H9H9-C	
Max. Pressure	15k psi	1000 bar	20k psi	1400 bar	43,500 psi	3000 bar
Max. Rotation Spd	1000 rpm		800 rpm		2000 rpm	
Flow Capacity	35 gpm	130 lpm	25 gpm	95 lpm	10 gpm	38 lpm
Flow Rating, Cv	1.6		1.1		.30	
Inlet Port	1/2 npt 0° or 90°		9/16 MP 0° or 90°		9/16 HP 0°	
Shaft Connection	1/4 npt		9/16 MP		9/16 HP	
Overall Length	4.6 in.	120 mm	5.9 in.	130 mm	5.9 in.	130 mm
Weight	1.63 lb	.74 kg	2.0 lb	.89 kg	2.0 lb	.89 kg
Body Diameter	1.75 in.	45 mm	1.75 in.	45 mm	1.75 in.	45 mm

46



www.advancedpressuresystems.com

**Toll Free in North America:
1 (877) 290-4277 or (281) 290-9950**



ROTARY COUPLINGS