

# 15k & 20k psi Floor Cleaners

## FCSV™ and FCSG™ Floor Cleaners

Available with or without vacuum system.



15k or 20k psi with a 24" jet path.

The **FCSV™** and **FCSG™** are self-rotating floor cleaners and surface preparation machines, operating at 15k or 20k psi. The differences between the two models is that the **FCSV™** comes with a 4" Camlock vacuum system while the **FCSG™** does not. These tools are made of corrosion resistant zinc plated steel and come with a **StoneAge® SG-30™** free spinning swivel connected to four jet arms. The swivel operates at 300 - 1,000 rpm from the jet reaction and uses **AP4 Attack Tips®**.

Now you can clean garages, parking lots and other flat surfaces safely and effectively while eliminating operator hazard. These tools perform a wide range of functions, including cleaning paint from gratings and degreasing surfaces, as well as removing coatings, decontaminates and membranes. They can also scarify concrete, clean tanks and tackle dirty pit floors.

The optional vacuum attachment allows waste and debris to be removed through a standard 4" Camlock vacuum hose connection. A hand operated lever on the push handle closes the dump valve.



Radiused arms for quality free-spinning jets.

### Floor Cleaner Specifications

MODEL	MAX. PRESURE	MAX. FLOW	JET PATH	HEIGHT RANGE	WEIGHT
<b>FCSV™ &amp; FCSG™</b>	15k or 20k psi	28 gpm	24 in.	1-5 in.	255 lbs
	1000 or 1400 bar	110 lpm	610 mm	30-130 mm	116 kg

# 40k psi Powered Cleaners

## The Deck Blaster™

### 8-Jet Bar Head

The Bar Head manifold allows up to eight **OS6 Sapphire** nozzles to be used at a time. Maximum jet path is 14".

### Convenient Controls

Handle operates pressure and rotation, pushbutton engages drive.

### Rotation Control

The rotation speed is independently controlled and is adjustable via a valve. It operates at 250 rpm-1,000 rpm.

### Self Propelled Drive

The **Deck Blaster™** uses air-powered speed adjustments to maximize efficiency and decrease cleaning time.

### Vacuum Recovery

A 3" vacuum attachment can pivot to either side for easy clean up.

### Height Adjustment


A simple adjustment allows the height to be changed quickly and easily.




SURFACE PREP

## "Automotive Paint" Grate Cleaner

We are proud to introduce our newest Deck Blaster™, a proven design for auto plant grates, called the FCT-UH™. This unit is specifically designed for cleaning auto plant paint grates. We have removed the vacuum, sized the dome to fit the manway access and designed a 6-arm manifold for adjustable jet angles, all on a very maneuverable 3-wheel chassis.

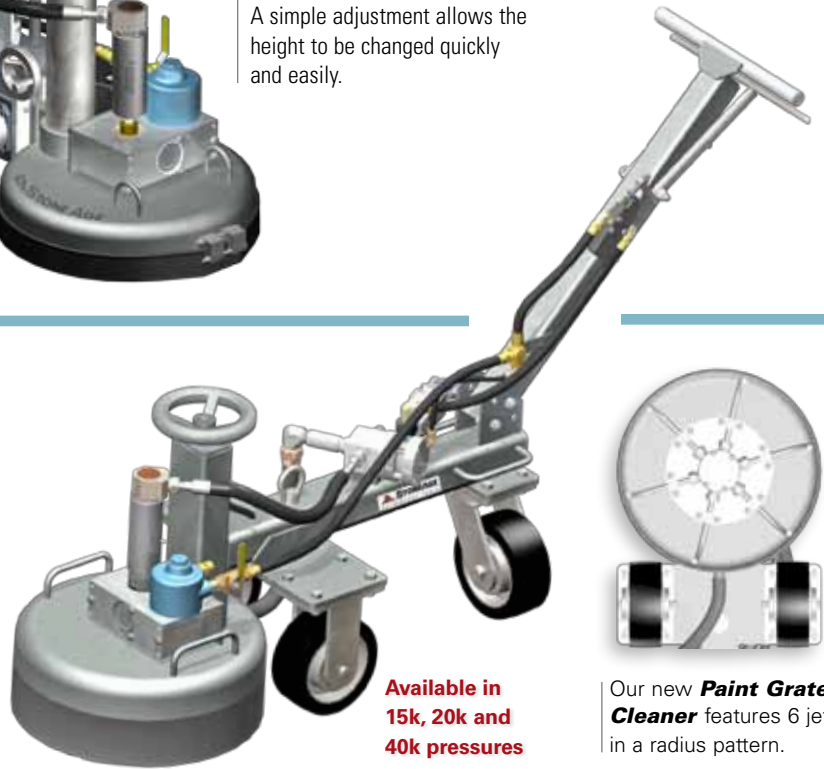

Available in 15k, 20k and 40k pressures



Our new **Paint Grate Cleaner** features 6 jets in a radius pattern.

## Deck Blaster™ and Grate Cleaner Specifications

MODEL	MAX. PRESS.	MAX. FLOW	JET PATH	SPEED RANGE	WEIGHT	NOZZLE
<b>DB™ *</b>	40k psi	6 gpm	14 in.	3 - 20 ft/min	215 lbs	<b>OS6</b>
	2800 bar	20 lpm	350 mm	.9 - 6.0 m/min	116 kg	<b>OS6</b>
<b>FCT-UH™ *</b>	40k psi	10 gpm	17.5 in.	N/A	290 lbs	<b>OS6</b>
	2800 bar	38 lpm	444 mm	N/A	131 kg	<b>OS6</b>

\* We offer both of these units with your choice of either a Jetstream (JS) or Gardner Denver (GD) dump valve.



www.advancedpressuresystems.com  
Toll Free in North America:  
1 (877) 290-4277 or (281) 290-9950

