






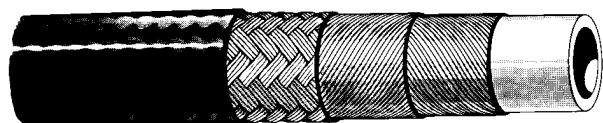


**2006ST Flex Lances
APS #40-034 Parker Polyflex Hose - Black Jacket**

Part Number	Min. I.D.	Max. O.D.	MAWP with 2.5:1 Safety Factor	MAWP with 4:1 Safety Factor	Min. Burst Pressure	Min. Bend Radius	Weight		
#									
	In. / mm	In. / mm	PSI / Bar	PSI / Bar	PSI / Bar	In. / mm	Lbs./Ft.	kg/m	
2245N-04V00	0.25" 6 mm	0.50" 13 mm	10,440 720	6,525 450	26,100 1800	2.76" 70	0.17	0.25	



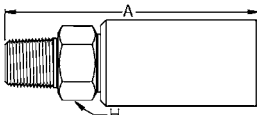
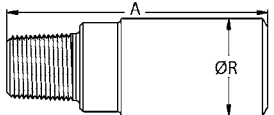
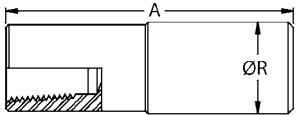
Construction: Polyamide core tube, high strength wire reinforced and a polyurethane outer cover.

Applications: Small diameter, low volumetric expansion hose. Ideal for pressure testing, portable hydraulic tools and hydraulic controls.

Fittings: See below. Parker ProLance®.

Temperature Range: -40° F and +140° F (-40° C and +60° C). Contact Polyflex for temperatures outside this range.

Example: **40-034-0707-025 is a 2006ST 1/4" NPT (M) x 1/4" NPT (M) x 25 feet long**

End Fitting Code	Thread	Overall Length	Diam. R / Hex Size H	MAWP PSI/Bar	Illustration
NPT (M) 10	3/8" NPT	A 2.63"/67 mm	H 0.75"/19 mm	10,400 717	
NPT (M) ProLance* 04 07	1/8" NPT 1/4" NPT	A 1.44"/37 mm 1.56"/40 mm	R 0.62"/16 mm 0.62"/16 mm	10,400 717	
NPT (F) ProLance* 51	1/4" NPT	A 1.89"/48 mm	R 1.75"/19 mm	10,000 690	



PARKER POLYFLEX
Stocking Supplier

www.advancedpressuresystems.com
Toll Free in North America:
1 (877) 290-4277 or (281) 290-9950

