









**2008ST Flex Lances  
APS #40-032 Parker Polyflex Hose - Black Jacket**

Part Number	Min. I.D.	Max. O.D.	MAWP with 2.5:1 Safety Factor	MAWP with 4:1 Safety Factor	Min. Burst Pressure	Min. Bend Radius	Weight	
#								
	In. / mm	In. / mm	PSI / Bar	PSI / Bar	PSI / Bar	In. / mm	Lbs./Ft.	kg/m
<b>2245D-05V00</b>	0.31" 8 mm	0.56" 14 mm	9,280 640	5,800 400	23,200 1600	3.94" 100 mm	0.22	0.33

**Construction:** Polyamide core tube, high strength wire reinforced and a polyurethane cover.

**Applications:** Low volumetric expansion hose for use with petroleum or synthetic hydraulic fluids, and in long lengths for waterblasting, pipe cleaning and line moleing applications.

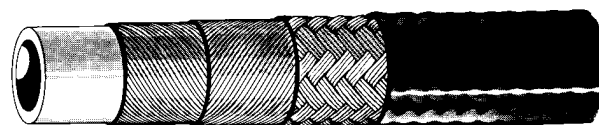

**Temperature Range:** -40° F and +140° F (-40° C and +60° C). Contact Polyflex for temperatures outside this range.

**Fittings:** See below.

**Example:** **40-032-1010-050 is a 2008ST 3/8" NPT (M) x 3/8" NPT (M) x 25 feet long**

End Fitting Code	Thread	Overall Length	Diam.	MAWP PSI/Bar	Illustration
NPT (M) 10	3/8" NPT	<b>A</b> 2.52"/64 mm	<b>R</b> 0.75"/19 mm	9,280 640	