









2104ST Flex Lances
APS #40-033 Parker Polyflex Hose - Black Jacket

Part Number	Min. I.D.	Max. O.D.	MAWP with 2.5:1 Safety Factor	MAWP with 4:1 Safety Factor	Min. Burst Pressure	Min. Bend Radius	Weight	
#								
	In. / mm	In. / mm	PSI / Bar	PSI / Bar	PSI / Bar	In. / mm	Lbs./Ft.	kg/m
2244N-025V00	0.17" 4 mm	0.38" 10 mm	17,400 1200	10,870 750	43,500 3000	2.17" 55 mm	0.13	0.19

Construction: Polyamide core tube, high strength wire reinforced and a polyurethane outer cover.


Applications: Small diameter, low volumetric expansion hose. Ideal for pressure testing, portable hydraulic tools that require extreme kink resistance and maximum flexibility. Available in long single lengths and in Twin-Line construction.

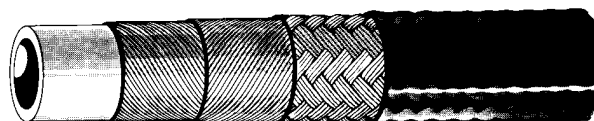

Temperature Range: -40° F and +140° F (-40° C and +60° C). Contact Polyflex for temperatures outside this range.

Fittings: See below.

Example: **40-033-0909-025 is a 2104ST 1/4" NPT (M) x 1/4" NPT (M) x 25 feet long**

End Fitting Code	Thread	Overall Length	Diam. R / Hex Size H	MAWP PSI/Bar	Illustration
NPT (M)		A	H		
53	1/8" NPT	1.86"/47 mm	0.47"/12 mm	15K/1034	
09	1/4" NPT	2.44"/62 mm	1.10"/28 mm	15K/1034	