






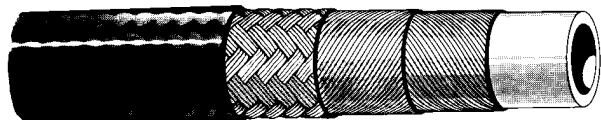


**2113ST Flex Lances**  
**APS #40-012 Parker Polyflex Hose - Black Jacket**

Part Number	Min. I.D.	Max. O.D.	MAWP with 2.5:1 Safety Factor	MAWP with 4:1 Safety Factor	Min. Burst Pressure	Min. Bend Radius	Weight	
#								
	In. / mm	In. / mm	PSI / Bar	PSI / Bar	PSI / Bar	In. / mm	Lbs./Ft.	kg/m
2244N-08V10	0.50" 13 mm	0.89" 23 mm	12,760 880	7,970 550	31,900 2200	5.90" 150	0.54	0.80





**Construction:** Polyamide core tube, high strength wire reinforced and a polyurethane outer cover.

**Applications:** Flexible, lightweight. chemical resistant alternative to steel pipe and rubber hose for applications such as waterblasting, gas transfer, chemical injection, wireline logging services and pressure testing.

**Temperature Range:** -40° F and +140° F (-40° C and +60° C). Contact Polyflex for temperatures outside this range.

**Fittings:** See below. Parker ProLance®.

**Example:** **40-012-1212-025 is a 2113ST 1/2" NPT (M) x 1/2" NPT (M) x 25 feet long**

End Fitting Code	Thread	Overall Length	Diam. R / Hex Size H	MAWP PSI/Bar	Illustration
NPT (M) 12	1/2" NPT	<b>A</b> 3.46"/88 mm	<b>H</b> 1.00"/25 mm	12,760 880	
Type M (F) Swivel 43	1"-12	<b>A</b> 3.27"/83 mm	<b>R</b> 1.25"/32 mm	12,760 880	



PARKER POLYFLEX  
 Stocking Supplier

[www.advancedpressuresystems.com](http://www.advancedpressuresystems.com)  
**Toll Free in North America:**  
**1 (877) 290-4277 or (281) 290-9950**

