


**2210ST Flex Lances**  
**APS #40-009 Parker Polyflex Hose - Green Jacket**

Part Number	Min. I.D.	Max. O.D.	MAWP with 2.5:1 Safety Factor	MAWP with 4:1 Safety Factor	Min. Burst Pressure	Min. Bend Radius	Weight	
#								
	In. / mm	In. / mm	PSI / Bar	PSI / Bar	PSI / Bar	In. / mm	Lbs./Ft.	kg/m
<b>2390N-06V13</b>	0.40" 10 mm	0.70" 18 mm	10,300 710	6,450 445	25,810 1780	3.00" 76 mm	0.28	0.42

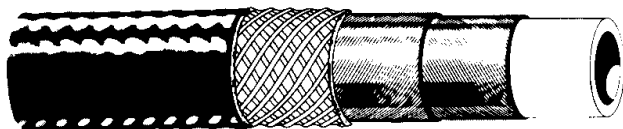

**Temperature Range:** -40° F and +140° F (-40° C and +60° C). Contact Polyflex for temperatures outside this range.

**Construction:** Polyamide core tube, high tensile strength wire reinforced and a polyurethane outer cover.

**Applications:** Small diameter, low volumetric expansion hose for use with petroleum or synthetic fluids, and in long lengths for waterblasting, pipe cleaning and line moleing applications.

**Fittings:** See below.

**Example:** **40-009-1010-025 is a 2210ST 3/8" NPT (M) x 3/8" NPT (M) x 25 feet long**

End Fitting Code	Thread	Overall Length	Diam. R / Hex Size H	MAWP PSI/Bar	Illustration
NPT (M)		<b>A</b>	<b>H</b>		
10	3/8" NPT	2.95"/75 mm	0.75"/19 mm	10,300	
12	1/2" NPT	3.16"/80 mm	0.87"/22 mm	710	