






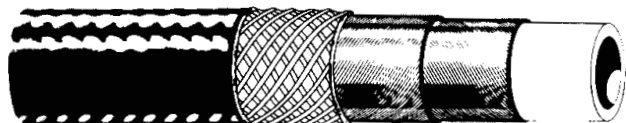


2220ST Flex Lances
APS #40-037 Parker Polyflex Hose - Green Jacket

Part Number	Min. I.D.	Max. O.D.	MAWP with 2.5:1 Safety Factor	MAWP with 4:1 Safety Factor	Min. Burst Pressure	Min. Bend Radius	Weight	
#								
	In. / mm	In. / mm	PSI / Bar	PSI / Bar	PSI / Bar	In. / mm	Lbs./Ft.	kg/m
2390N-12V03	0.81" 21 mm	1.14" 29 mm	8,100 559	5,575 384	22,300 1538	6.00" 152 mm	0.63	0.94




Temperature Range: -40° F and +140° F (-40° C and +60° C). Contact Polyflex for temperatures outside this range.

Construction: Polyamide core tube, high strength wire reinforced and a polyurethane outer cover.

Applications: Flexible, kink-resistant construction suitable for chemical fluids and operations of hydraulic tools and equipment.

Fittings: See below.

Example: 40-037-1414-025 is a 2220ST 3/4" NPT (M) x 3/4" NPT (M) x 25 feet long

End Fitting Code	Thread	Overall Length	Diam. R / Hex Size H	MAWP PSI/Bar	Illustration
NPT (M)		A	H		
14	3/4" NPT	3.88"/99 mm	1.07"/27 mm	8,100	
16	1" NPT	4.10"/104 mm	1.42"/36 mm	559	



PARKER POLYFLEX
 Stocking Supplier

www.advancedpressuresystems.com
Toll Free in North America:
1 (877) 290-4277 or (281) 290-9950

