









**Blue Snake 1/2" NPT Flex Lances
APS #40-028 Parker Polyflex Hose - Red Jacket**

Part Number	Min. I.D.	Max. O.D.	MAWP with 2.5:1 Safety Factor	MAWP with 4:1 Safety Factor	Min. Burst Pressure	Min. Bend Radius	Weight
#							
	In. / mm	In. / mm	PSI / Bar	PSI / Bar	PSI / Bar	In. / mm	Lbs./Ft. kg/m
2X90N-08V14	0.50" 13 mm	0.91" 23 mm	15,080 1040	9,425 650	37,700 2600	3.15" 80 mm	0.45 0.67

Construction: Polyamide core tube, steel wire and fiber combination reinforcement with a polyurethane outer cover.

Applications: Flexible, lightweight, chemical resistant alternative to rubber hose for waterblast cleaning applications in pulp and paper mills, steel mills, power plants and petrochemical plants. Available in long lengths.

Example: **40-028-1212-025 is a Red Snake 1/2" NPT (M) x 1/2" NPT (M) x 25 feet long**

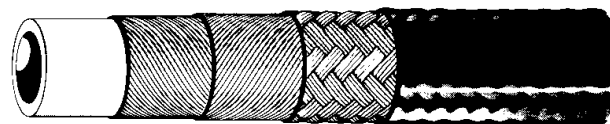

Temperature Range: -40° F and +140° F (-40° C and +60° C). Contact Polyflex for temperatures outside this range.

Fittings: See below.

End Fitting Code	Thread	Overall Length	Diam. R / Hex Size H	MAWP PSI/Bar	Illustration
NPT (M) 12	1/2" NPT	A 3.68"/93 mm	H 0.87"/22 mm	15,000 1034	