



Lancing Power Packages

Single, Dual and Triple Lance Options


Single Rotary

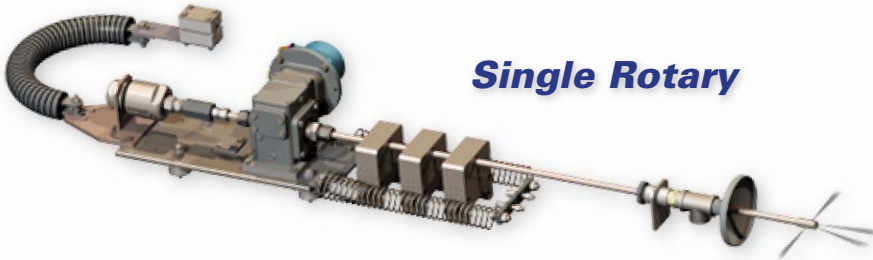

Dual Rotary

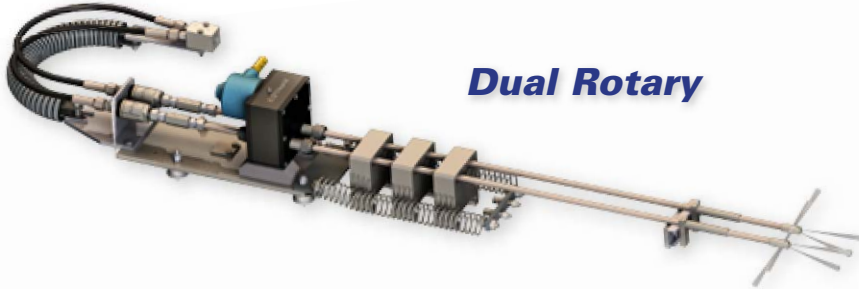

Triple Rotary

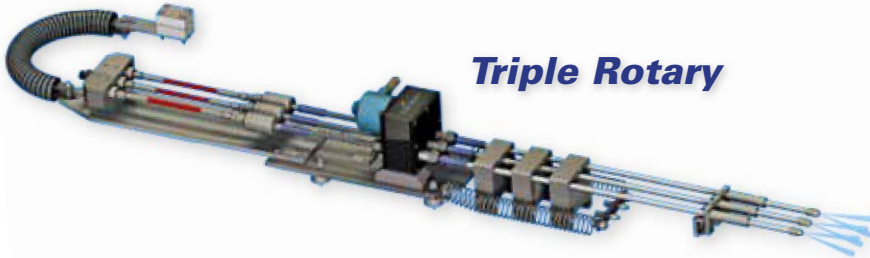

STEP 2

Power Package

Choose a 15k, 20k or 40k psi power package with either single, dual or triple lance capability.

15k, 20k & 40k psi

The single rotary package features high speed rotation at 120-600 rpm, and requires compressed air with a pressure of 80-100 psi and flows from 70-130 cfm.

15k, 20k & 40k psi

The dual rotary package features high speed rotation, from 105-525 rpm rotation and requires compressed air with a pressure of 80-100 psi, and flows from 70-130 cfm. We redesigned the rotary gearbox for more torque and increased durability. A hydraulic option is also available.

15k, 20k & 40k psi

The triple lance rotary system requires compressed air with a pressure of 80-100 psi, flows from 70-130 cfm and operates between 125-620 rpm. This model also has a redesigned rotary gearbox for more torque and increased durability. A hydraulic option is also available.

Lancing Power Package Specifications

Package Pressure	15k psi 1000 bar	20k psi 1400 bar	40k psi 2800 bar
Single Rotary Package	BRLM™ 310	BRLM™ 320-15	BRLM™ 330-15
Hose Connection	1/2 npt	3/4 MP	9/16 HP
Lance Connection	1/8, 1/4 npt	3/8, 9/16 MP	3/8, 9/16 HP
Dual Rotary Package	BRLM™ 341	BRLM™ 351-15	BRLM™ 361-15
Hose Connection	3/4 npt	3/4 MP	9/16 HP
Lance Connection	1/8, 1/4 npt	3/8, 9/16 MP	3/8, 9/16 HP
Triple Rotary Package	BRLM™ 343	BRLM™ 353-15	BRLM™ 363-15
Hose Connection	3/4 npt	3/4 MP	9/16 HP
Lance Connection	1/8, 1/4 npt	3/8, 9/16 MP	3/8, 9/16 HP