

Maximum Flow & Pressure Models

When High Flow Capacity or Ultra High Pressure is Needed

SM Series - The Largest Capacity Swivels We Make!

Designed similar to our **SG** swivels, the **SM** swivel series handles up to 3,500 earth-shaking horsepower. They are used in a variety of tools for cleaning boilers, furnaces, tube bundles, large tanks and vessels. The inlet is available with either a 0° or 90° port.




SM-P16-0°

SM-P20-90°

SM-Air

SM-P16-0° is shown here with the **SM-Air** assembly.

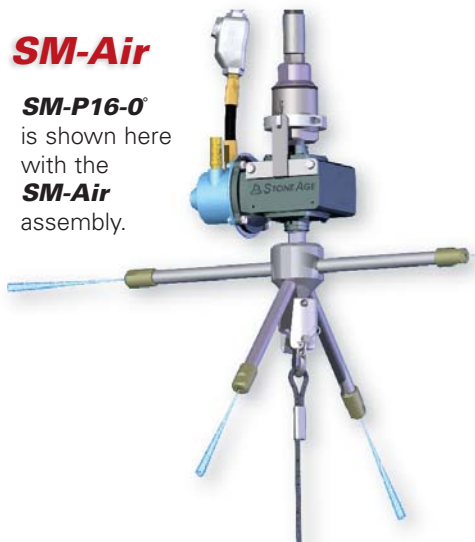

SM Swivel Specifications		
MODEL	SM-P16	SM-P20
Maximum Pressure	12k psi 830 bar	10k psi 700 bar
Maximum Rotation	300 rpm	300 rpm
Flow Capacity	300gpm 1100 lpm	600 gpm 2270 lpm
Flow Rating, Cv	13	18
Inlet Port	1 npt	1.25 npt
Shaft Connection	1 npt	1.25 npt
Overall Length	7.3 in. 190 mm	7.3 in. 190 mm
Weight	10 lb 4.5 kg	11 lb 5 kg
Body Diameter	3.5 in. 8.9 mm	3.5 in. 8.9 mm

UH Swivels - The Best in the Industry! Handle pumps to 450 HP

UH-H9H6
0° or 90° Inlet
Available



**High Flow
and 40k psi**

**Note: Specify the UH-H9 G12
for Our Powered Surface Prep Tools**

UH Swivel Specs	
MODEL	UH-H9H6
Maximum Pressure	40k psi 2800 bar
Maximum Rotation	1000 rpm*
Flow Capacity	20 gpm 76 lpm
Flow Rating, Cv	.5
Inlet Port	9/16 HP
Shaft Connection	3/8 HP or G12
Overall Length	8.75 in. 222 mm
Weight	7.5 lb 3.4 kg
Body Diameter	2.5 in. 64 mm

*Break in new seals for 1/2 hour at 500 rpm max.



ADVANCED PRESSURE SYSTEMS

1-877-290-4277 ▲ FAX: 281-290-9952

www.advancedpressuresystems.com

E-mail orders: sales@advancedpressuresystems.com

